Peplink Balance One

Gigabit Dual-WAN Router with Dual-Band 11n Wi-Fi





1 Gbps

Router Throughput

Dual-Band

2.4GHz & 5GHz

SpeedFusion TM Bonding Technology

Unbreakable VPN



Also supports InControl 2 cloud management. Learn more at peplink.com/incontrol-2/

One Huge Leap Forward for SMB, and Branch Networking.

The Balance One gigabit router with dual-WAN load balancing delivers big-business uptime and speed in an affordable package designed just for SMBs, branch offices, and power users. Featuring simultaneous dual-band 802.11n Wi-Fi, eight GbE LAN ports, and exclusives like our built-in AP Controller, captive portals, and InControl 2 cloud management, it's the one router you need for enterprise-grade networking in smaller environments.

Gigabit Performance. Uptime, All the Time.

The Balance One dual-WAN router drives data at 1Gbps and keeps connections dependable and fast with automatic balancing and failover between links. Connect up to two fiber, 4G LTE/3G cellular, or other links in any combination for 24/7 connectivity and lightning-quick performance.

Superfast Dual-Band Wi-Fi. Eight GbE LAN Ports.

With simultaneous 2.4 and 5Ghz 802.11n Wi-Fi and eight gigabit Ethernet LAN ports onboard, the Peplink Balance One makes it easy to connect all your devices at high speeds, without complicated setup, compromises, or external switches to buy and maintain.

Unparalleled Modem Support.


The Balance One's USB port supports more than 200 4G LTE/3G modems used by a variety of carriers worldwide. Whatever you're using, it'll probably work without a hitch.

Built-in AP Controller and Captive Portals. Easy Management Anywhere.

AP Controller puts you in charge of all connected access points using an intuitive built-in management console. You can also create and manage custom captive portals using your Balance One. And you can do it all from anywhere using InControl 2 cloud management.

Access Company Resources from Home Using SpeedFusion Unbreakable VPN




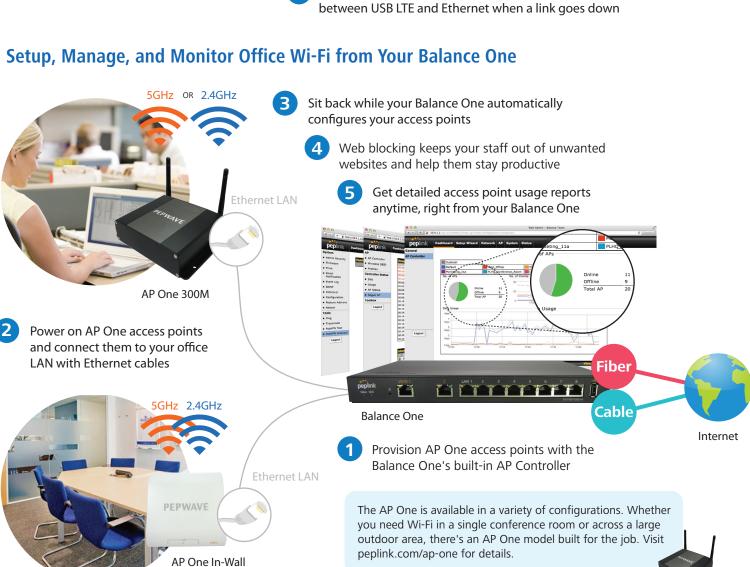

Connect Your Smart Home with Gigabit Fiber Internet (FTTH) and LTE Backup for 100% Uptime



Create Guest Hotspots Complete with Captive Portals

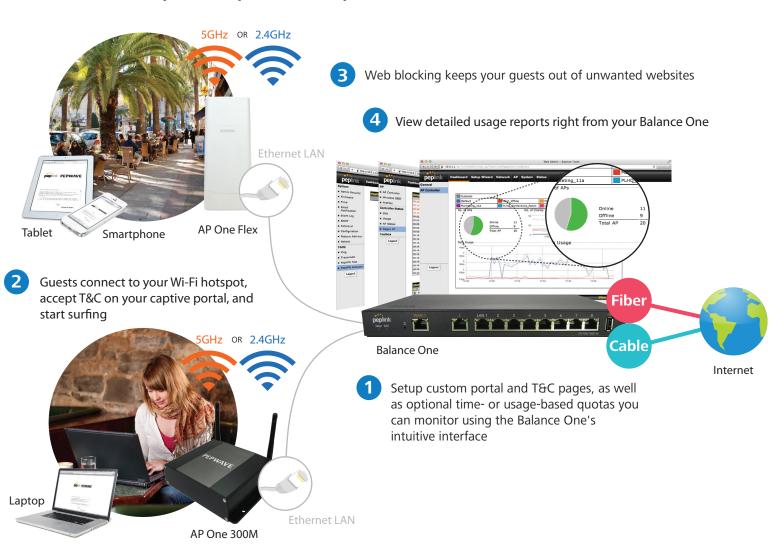

Specifications

Balance One

2x 10/100/1000M Ethernet Ports WAN Interface 1x USB Interface

LAN Interface 8x 10/100/1000M Ethernet Ports

Wi-Fi Interface Simultaneous Dual-Band 802.11a/b/g/n Access Point

Wi-Fi AP Operating 2412 - 2472 and 5180 - 5825 MHz Frequency

Router Throughput 1Gbps

Number of SpeedFusion Peers 2

PepVPN/SpeedFusion 30Mbps Throughput

Device: 12V - 24V DC Power Input

AC Adapter: AC Input 100V - 240V, DC Output 12V

Power Consumption 15W (max.)

6.3 x 10.7 x 1.2 inches 160 x 271 x 30 mm Dimension

 $(L \times W \times H)$

1.3 pound Weight 570 grams


-40° - 149°F **Operating Temperature** -40° - 65°C

Humidity 15% – 95% (non-condensing)


Certifications FCC, CE, RoHS

1-Year Limited Warranty Warranty

For the most updated specifications, please refer to our website: http://www.peplink.com/balance-one/.









Features

WAN

USB 4G/3G Modem Support Support for PPPoE, Static IP, DHCP Support for Dynamic DNS services WAN Link Health Check Intelligent Failover Bandwidth Allowance Monitor

LAN

DHCP Server for LAN Clients Extended DHCP Options **DHCP Reservation** DNS Proxy for LAN Clients

PepVPN/SpeedFusion /

Site-to-Site VPN Bandwidth Aggregation ^ Hot Failover ^ 256-bit AES Encryption Pre-shared Key Authentication Dynamic Routing PPTP VPN Server RADIUS, LDAP Authentication IPsec VPN (Network-to-Network)

Load Balancing

Intelligent Failover Session Persistence Per-Service Load Distribution Multiple Algorithms

Complete VPN Solution

Static Routes Port Forwarding Many to One, One to One NAT NAT Pool SIP ALG, H.323 ALG UPnP, NAT-PMP WINS Server

Advanced OoS

Individual Bandwidth Limit Application Prioritization By User Groups SÍP, HTTPS, VPN QoS **Custom Application QoS**

Networking

NAT and IP Forwarding

Security

Stateful Firewall DoS Prevention

AP Controller

AP Controller Support Wi-Fi Usage Statistics

Captive Portal Support

Support for Wired and Wireless LAN Clients Support RADIUS Authentication Time and Usage Quotas on Open Access Mode Built-in Customizable Splash Page

Device Management

Web Administrative Interface Command Line Interface InControl Cloud Management **Email Notification** Active Client & Session Lists Bandwidth Usage Statistics Syslog Service SNMP v1, v2c and v3

Certification

FCC. CE. RoHS

^ SpeedFusion is available as an optional add-on

